

07-14-00

A

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i>	Attorney Docket No.	S1022/8394
	First Named Inventor or Application Identifier	
	WUIDART, Luc et al.	
	Express Mail Label No.	EL 018 097 000 US
Date of Deposit		July 13, 2000

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents</i>	ADDRESS Box Patent Application TO: Commissioner for Patents Washington, DC 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form <i>(Submit an original, and a duplicate for fee processing)</i> 2. <input checked="" type="checkbox"/> Specification [Total pages 15] 12 - pages description 1 - page abstract 2 - pages claims 12 - Total claims 3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total sheets 1] <input type="checkbox"/> Informal <input checked="" type="checkbox"/> Formal [Total drawings 1-2] 4. <input checked="" type="checkbox"/> Oath or Declaration [Total pages 3] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) <i>(for continuation/divisional with Box 17 completed)</i> [Note Box 5 below] i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). 5. <input type="checkbox"/> Incorporation by Reference <i>(usable if Box 4b is checked)</i> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	6. <input type="checkbox"/> Microfiche Computer Program (Appendix) 7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies ACCOMPANYING APPLICATION PARTS 8. <input checked="" type="checkbox"/> Assignment Papers/cover sheet & documents(s) 9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <i>(when there is an assignee)</i> <input type="checkbox"/> Power of Attorney 10. <input type="checkbox"/> English Translation of Document <i>(if applicable)</i> 11. <input checked="" type="checkbox"/> Information Disclosure Statement PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations 12. <input type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(Should be specifically itemized)</i> 14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired 15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i>
16. Other: PURSUANT TO 35 U.S.C. §119, APPLICANTS HEREBY CLAIMS PRIORITY TO FRENCH PATENT APPLICATION 99 09564 FILED JULY 20, 1999	

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:
- ☐ Cancel in this application original claims of the prior application before calculating the filing fee.
- ☐ Amend the specification by inserting before the first line the sentence:


This application is a ☐ continuation ☐ divisional of application serial no. , filed , entitled , and now .

18. CORRESPONDENCE ADDRESS

Correspondence address below

ATTORNEY'S NAME	James H. Morris, Reg. No. 34,681				
NAME	Wolf, Greenfield & Sacks, P.C.				
ADDRESS	600 Atlantic Avenue				
CITY	Boston	STATE	MA	ZIP	02210
COUNTRY	USA	TELEPHONE	(617) 720-3500	FAX	(617) 720-2441

19. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	James H. Morris, Reg. No. 34,681
SIGNATURE	
DATE	July 13, 2000

Attorney Docket No. S1022/8393

Inventor or Identifier: WUIDART, Luc et al.

Serial No: Not yet assigned

Filed: Herewith

CHECK BOX, if applicable:

For: SIZING OF AN ELECTROMAGNETIC TRANSPONDER
SYSTEM FOR A DEDICATED DISTANT COUPLING
OPERATION☐ **DUPLICATE**

Fee Calculation Sheet

CLAIMS	FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
TOTAL CLAIMS (37 CFR 1.16(c))		123-20=	0 x	\$18	= \$ 0.00
INDEPENDENT CLAIMS (37 CFR 1.16(b))		2-3=	0 x	\$78	= \$ 0.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d)) +				\$260	= \$
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
Total of above Calculations =					\$ 690.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					\$
Assignment Recordation Fee (if any)					\$ 40.00
Other Fees (if any).					\$
TOTAL =					\$ 730.00

1. A check in the amount of \$ 730.00 is enclosed.

General Authorization to Charge Deposit Account and General Request for Extension of Time

2. a. ☒ If the filing of any paper in this application necessitates the payment of a fee under 37 CFR §§ 1.16 ☒ 1.17 or ☐ 1.18, and the fee due is in an amount different from any enclosed check or if no check is enclosed, the Commissioner is hereby authorized to charge any deficiency or credit any overpayment to Deposit Account No. 23/2825.
- b. ☐ The applicant hereby revokes any prior authorization to charge a fee due under 37 CFR §§ 1.16 ☐ 1.17 or ☐ 1.18.
3. If the filing of any paper in this application necessitates an extension of time under 37 CFR §1.136(a), the applicant hereby requests such extension of time. If the fee due is in an amount different from any enclosed check or if no check is enclosed, the Commissioner is hereby authorized to charge any deficiency or credit any overpayment to Deposit Account No. 23/2825.


 James H. Morris, Reg. No. 34,681
 Wolf, Greenfield & Sacks, P.C.
 600 Atlantic Avenue
 Boston, MA 02210-2211
 (617) 720-3500
 Attorneys of Record

Docket No. S1022/8394
 Date: July 13, 2000

**SIZING OF AN ELECTROMAGNETIC TRANSPONDER SYSTEM FOR A
DEDICATED DISTANT COUPLING OPERATION**

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

The present invention relates to systems using electromagnetic transponders, that is, transceivers (generally mobile) capable of being interrogated in a contactless and wireless manner by a unit (generally fixed), called a read and/or write terminal. The present invention more specifically relates to transponders having no independent power supply. Such transponders extract the power supply required by the electronic circuits included therein from the high frequency field radiated by an antenna of the read/write terminal. The present invention applies to such transponders, be they read only transponders, that is, adapted to operate with a terminal only reading the transponder data, or read/write transponders, which contain data that can be modified by the terminal.

15

2. Discussion of the Related Art

Systems using electromagnetic transponders are based on the use of oscillating circuits including a winding forming an antenna, on the transponder side and also on the read/write terminal side. These circuits are intended to be coupled by a close magnetic field when the transponder enters the field of the read/write terminal.

20

Fig. 1 very schematically shows, in a simplified way, a conventional example of a data exchange system between a read/write terminal 1 and a transponder 10.

Generally, terminal 1 is essentially formed of an oscillating circuit formed of an inductance L1 in series with a capacitor C1 and a resistor R1, between an output terminal 2 of an amplifier or antenna coupler (not shown) and a reference terminal 3 (generally, the ground). The antenna coupler belongs to a circuit 4 for controlling the oscillating circuit and exploiting received data including, among others, a modulator-demodulator and a microprocessor for processing the control signals and the data. In the example shown in Fig. 1, node 5 of connection of capacitor C1 with inductance L1 forms a terminal for sampling a data signal received from transponder 10 for the demodulator. Circuit 4 of the terminal generally communicates with different input/output circuits (keyboard, screen, means of transmission to a provider, etc.) and/or processing circuits,

30

not shown. The circuits of the read/write terminal draw the power required by their operation from a supply circuit (not shown) connected, for example, to the electric supply system.

A transponder 10, intended for cooperating with a terminal 1, essentially includes
5 an inductance L2, in parallel with a capacitor C2 between two input terminals 11, 12 of a circuit 13 of control and processing of transponder 10. Terminals 11, 12 are, in practice, connected to the input of a rectifying means (not shown), the outputs of which define D.C. supply terminals of the circuits internal to the transponder. In Fig. 1, the load
10 formed of the circuits of transponder 10 on the oscillating circuit have been modeled by a resistor R2, shown in dotted lines, in parallel with inductance L2 and capacitor C2.

The oscillating circuit of terminal 1 is excited by a high-frequency signal (for example, 13.56 MHz) intended for being sensed by a transponder 10. When transponder 10 is in the field of terminal 1, a high-frequency voltage is generated across terminals 11, 12 of the transponder's resonant circuit. This voltage, after being rectified, is intended for
15 providing the supply voltage of electronic circuits 13 of the transponder. These circuits generally essentially include a microprocessor, a memory, a demodulator of the signals possibly received from terminal 1, and a modulator for transmitting information to the terminal.

The data transmission from transponder 10 to terminal 1 is generally performed
20 by modifying the load of oscillating circuit L2, C2, so that the transponder draws a lesser or greater amount of power from the high-frequency magnetic field. This variation is detected, on the side of terminal 1, because the amplitude of the high-frequency excitation signal is maintained constant. Accordingly, a power variation of the transponder translates as a variation of the current amplitude and phase in antenna L1.
25 This variation is then detected, for example, by a measuring the signal of terminal 5, either by means of a phase demodulator, or by means of an amplitude demodulator. The load variation on the transponder side is generally performed by means of an electronic switch for controlling a resistor or a capacitor modifying the load of the oscillating circuit. The electronic switch is generally controlled at a so-called sub-carrier frequency
30 (for example, 847.5 kHz), much smaller (generally with a ratio of at least 10) than the frequency of the excitation signal of the oscillating circuit of terminal 1.

In the case of a phase demodulation by terminal 1, its modulator detects, in the sub-carrier half-periods when the electronic switch of the transponder is closed, a slight phase shift (by a few degrees, or even less than one degree) of the high-frequency carrier with respect to a reference signal. The demodulator output then provides a signal that is an image of the control signal of the electronic switch of the transponder, which can be decoded to restore the transmitted binary data.

To obtain a proper operation of the system, the oscillating circuits of terminal 1 and of transponder 10 are generally tuned on the carrier frequency, that is, their resonance frequency is set, for example, to the 13.56-MHz frequency. This tuning aims at maximizing the power transfer to the transponder, generally, a card of credit card size integrating the different transponder components.

The fields of application of electromagnetic transponders (for example, the crossing of highway tolls, the counting or the authentication of transponder carriers, etc.) may make it desirable to guarantee that a transponder only operates in a predetermined distance relation with a read/write terminal, more specifically in a distant relation, generally defined by a distance greater than 5 cm separating the respective antennas of the transponder and of the read/write terminal.

For example, in applications such as the crossing of highway tolls where the driver is necessarily far from the terminal, it is indispensable to guarantee the transaction security and prevent the pay or authentication signal from being intercepted by a "pirate" terminal placed closer to the transponder. In this case, it must be guaranteed that the transponder will only operate in a distant relation with the terminal.

Still as an example, when a transponder is in the terminal field, another transponder can also be in this field. Conventional systems then favor the operation of the transponder that is closest to the terminal. In some applications, it may however be desired to favor the operation of the most distant transponder. In this case, conventional systems provide no acceptable solution.

Indeed, a transponder that would then be closer to the terminal could capture the information transmitted by the terminal to the distant transponder, which does not provide the desired guarantees in terms of security. Further, a pirate terminal can then be

interposed between the authorized terminal and the transponder and then intercept the transponder's information, which is not desirable either.

Another problem that is raised is that, in conventional systems, a transponder in a relatively distant coupling relation with a terminal will receive less power than a
5 transponder placed closer to the terminal. In such a case, the system operation risks suffering therefrom.

Summary Of The Invention

The present invention aims at providing a solution to the need for operation in a
10 relatively distant range of electromagnetic transponder systems.

The present invention aims, in particular, at providing a solution that enables structurally dedicating a transponder and/or a terminal to an operation in a relatively distant range.

More generally, the present invention aims at providing a solution that enables
15 structurally dedicating a transponder and/or a terminal to an operation in a relation where the antennas are at a distance greater than a predetermined value from each other.

The present invention also aims at providing a solution that is particularly simple to implement for the manufacturer and that is reliable in time.

To achieve these and other objects, the present invention provides an
20 electromagnetic transponder of the type including a parallel oscillating circuit adapted to being excited by a series oscillating circuit of a read/write terminal when the transponder enters the field of the terminal, the components of the oscillating circuit of the transponder being sized so that the coupling coefficient between the respective oscillating circuits of the terminal and of the transponder rapidly decreases when the
25 distance separating the transponder from the terminal becomes smaller than a predetermined value.

According to an embodiment of the present invention, said value is 5 cm.

According to an embodiment of the present invention, an inductance of the parallel oscillating circuit is reduced or minimized.

30 According to an embodiment of the present invention, inductance L2 of the parallel oscillating circuit is chosen so that the following relation is respected:

$$k_{opt} = \sqrt{\frac{R1L2}{R2L1}},$$

where k_{opt} represents the coupling coefficient providing a maximum voltage across the parallel oscillating circuit, where $R1$ represents the series resistance of the series oscillating circuit, where $R2$ represents the equivalent resistance of the transponder brought in parallel on inductance $L2$, and where $L1$ represents the inductance of the series oscillating circuit.

According to an embodiment of the present invention, the components of the oscillating circuit of the transponder are sized based on an operating point at a median distance of a desired operating range, chosen to correspond to a coupling coefficient as close as possible to an optimal coupling coefficient respecting the following relation:

$$V2_{max}(k_{opt}) = \sqrt{\frac{R2}{R1} \frac{Vg}{2}},$$

where $V2_{max}$ represents the voltage across the parallel oscillating circuit for the optimal coupling between the oscillating circuits, where $R1$ represents the series resistance of the series oscillating circuit, where $R2$ represents the equivalent resistance of the transponder brought in parallel on its oscillating circuit, and where Vg represents the excitation voltage of the series oscillating circuit.

According to an embodiment of the present invention, the number of turns of the inductance of the oscillating circuit of the transponder is smaller than 3.

According to an embodiment of the present invention, the respective values of the capacitance and of the inductance of the parallel oscillating circuit range between 20 and 500 pf and between 0.1 and 10 μ H.

The present invention also provides a terminal for generating an electromagnetic field adapted to cooperating with at least one transponder when said transponder enters this field, including a series oscillating circuit for generating the electromagnetic field, this series oscillating circuit being sized so that the coupling coefficient between the respective oscillating circuits of the terminal and of the transponder strongly decreases when the distance separating the transponder from the terminal becomes smaller than a predetermined value.

According to an embodiment of the present invention, the components of the oscillating circuit of the terminal are sized to fulfill the operating conditions of the transponder.

According to an embodiment of the present invention, the inductance of the terminal's series oscillating circuit includes between 3 and 15 turns.

The present invention further relates to a system of contactless electromagnetic transmission between a terminal and a transponder.

The foregoing objects, features and advantages of the present invention, will be discussed in detail in the following non-limiting description of specific embodiments in connection with the accompanying drawings.

Brief Description Of The Drawings

Fig. 1, previously described, very schematically shows a read/write terminal and an electromagnetic transponder of the type to which the present invention applies; and

Fig. 2 shows an example of variation of the voltage across the oscillating circuit of a transponder according to the distance separating it from a terminal.

Detailed Description

For clarity, only those elements necessary to the understanding of the present invention have been shown in the drawings and will be described hereafter. In particular, the circuits for controlling and exploiting the oscillating circuits of the transponder and of the terminal have not been detailed.

A feature of the present invention is to provide a specific sizing of the oscillating circuit of an electromagnetic transponder so that said transponder is structurally dedicated to an operation in a relatively distant range, that is, at more than 5 cm from a read/write terminal and, preferably, between 5 cm and the system range limit. This range depends on the transponder power consumption and is, for example, on the order of 20 to 30 cm for low-consumption transponders of tag type and on the order of 10 to 20 cm for transponders equipped with microcontrollers.

The notion of distance to which the present invention refers is the distance separating respective antennas L1, L2 (Fig. 1) of a transponder 10 and of a terminal 1.

The present invention thus provides placing, preferably by respective sizings of the oscillating circuits of the transponder and of the antenna, the operating point of the system to guarantee the desired range operation at the tuning frequency, that is, when the resonance frequencies of the oscillating circuit substantially correspond to the frequency of the remote supply carrier (for example, 13.56 MHz).

Fig. 2 shows the variation of voltage V2 across terminals 11, 12 of the transponder according to distance d separating the transponder from a read/write terminal.

The curve of Fig. 2 can also be considered as showing the variation of voltage V2 according to coupling coefficient k between the oscillating circuits of the transponder and of the terminal. Indeed, the coupling between the oscillating circuits is a function of the distance separating the antennas. More specifically, coupling coefficient k is, as a first approximation, proportional to 1-d. Accordingly, in the following description, reference will be made either to distance or to the coupling coefficient as the abscissa of the characteristic of Fig. 2. The x-axis represents a distance d increasing towards the right of the drawing and a coupling coefficient k increasing towards the left of the drawing.

Voltage V2 exhibits a maximum V2max for an optimal value of coupling coefficient kopt. This value corresponds to the smallest coupling value between the two antennas for which voltage V2 is maximum when the frequency corresponds to the resonance frequency of the oscillating circuits. This value corresponds, according to the present invention, to a relatively large distance. For a given frequency and sizing determining the operating conditions, voltage V2 decreases on either side of the optimal coupling position.

The curve exhibits a point of inflexion for a coupling value of $k_{opt}\sqrt{3}$, that is, for a distance smaller than the optimal coupling position. On the smaller distance side, the curve tends towards an asymptote at a minimum voltage position V2min. On the greater distance side at the optimal coupling position, the decrease of voltage V2 is stronger. Further, the voltage level of the point of inflexion at $k_{opt}\sqrt{3}$ reappears, symmetrically with respect to the optimal coupling position, for a value $k_{opt}\div\sqrt{3}$.

The relation between optimal coupling coefficient k_{opt} and the components of the oscillating circuits is the following:

$$k_{opt} = \sqrt{\frac{R1L2}{R2L1}}$$

A coupling coefficient k equal to one corresponds to the theoretical limiting value. Accordingly, coefficient k_{opt} is, in practice, always smaller than 1.

More generally, coupling coefficient k is provided by formula $k = m/\sqrt{L1L2}$, where m represents the mutual inductance between the oscillating circuits. This mutual inductance essentially depends on the geometry of antennas or inductances $L1$ and $L2$.

A feature of the present invention is to determine, by means of the respective values of the oscillating circuit components, a distance operating point such that moving away from this operating point strongly decreases the coupling between the oscillating circuits.

Thus, for a distant operation, the oscillating circuits will be sized so that optimal coupling coefficient k_{opt} be as much as possible to the right of the drawing, that is, towards large distances. Two possibilities are then available, by the sizing of the oscillating circuits, for placing the real operating range in terms of coupling and distance.

According to the present invention, the zero distance point will be chosen to correspond, while being as far as possible to the optimal coupling point, to a coupling coefficient greater than the optimal coefficient and adapted to the minimum voltage V_{2tr} required for a proper transponder operation. This amounts to placing an operating point at a zero distance to the left of the optimal coupling position on Fig. 2. This point corresponds to a real maximum coupling k_{max} . Coefficient k_{max} depends on the respective geometries of antennas $L1$ and $L2$ and is, of course, included between 0 and 1. In practice, it should be noted that the real maximum coupling coefficient k_{max} between two oscillating circuits generally does not exceed 0.7.

Preferably, the operating range is positioned on the characteristic of Fig. 2 so that, when distance d decreases, the coupling coefficient strongly decreases. The best solution is that the optimal coupling point approximately corresponds to the center of the desired distance operating range. Thus, the most regular possible remote supply power is obtained, since the operating range includes the "bulge" of the characteristic. Another

advantage then is that the distance decrease is located in a portion having a steep slope. Thus, as soon as the distance deviates from the operating range, the coupling coefficient rapidly decreases so that the transponder is then no longer supplied. Preferably, the real maximum operating point will be chosen so that the corresponding voltage V_2 is far
5 from position k_{opt} and corresponds to a smaller distance, and so that minimum operating voltage V_{2tr} of the transponder is included between the voltage corresponding to the point of inflexion and voltage V_{2max} .

Preferably, the smallest possible value of inductance L_2 of transponder 10, while remaining compatible with an integration of capacitor C_2 for the desired resonance
10 frequency (for example, 13.56 MHz), is chosen.

It should be noted that, while in conventional systems the value of inductance L_2 of the transponder is desired to be decreased to decrease the system range, the present invention conversely provides decreasing this inductance for a dedicated operation in distant coupling.

15 Searching the smallest possible inductance L_2 is compatible with searching the smallest possible remote supply voltage for the zero distance. Similarly, it will be desired to maximize the value of equivalent resistance R_2 , still for decreasing the distant coupling coefficient so that the optimal coupling is at the farthest possible distance (which amounts to saying that a small value is desired). An advantage of an increase of
20 resistance R_2 is that this decreases the consumption. The transponder's remote supply need and the dissipation therein will however be taken into account.

It should be noted that the search for the smallest possible inductance L_2 corresponds to a decrease of the number of turns of this inductance (for example, of the number of conductive turns in antenna L_2 formed on the chip card forming the
25 transponder). This decrease of the number of turns decreases the parasitic resistance of inductance L_2 . However, the decrease of the parasitic series resistance corresponds, brought in parallel on the oscillating circuit, to an increase of resistance R_2 . This is thus favorable to increasing resistance R_2 .

An advantage of increasing the value of capacitor C_2 to maintain the resonance
30 frequency despite the small inductance L_2 is that this increases the quality factor of the transponder. Indeed, the quality factor of a parallel resonant circuit is equal to $\omega R_2 C_2$,

where ω represents the pulse of the oscillating circuit. Now, the greater the quality factor, the larger the range.

According to a preferred embodiment of the present invention, the respective values of the different components are determined as follows.

- 5 First, the application and the energetic needs of the transponder determine the voltage V_{2tr} to be obtained by remote supply. For a given excitation voltage V_g of the oscillating circuit of the terminal, the voltage V_2 recovered by the transponder is a function of the respective values of series resistance R_1 of the terminal and of equivalent resistance R_2 of the transponder in parallel on its oscillating circuit. The value of
- 10 resistance R_2 can be evaluated based on the transponder components (microprocessor, regulator, etc.) that determine the remote supply need to be maintained.

At theoretical optimal coupling point k_{opt} , voltage V_{2max} is provided by the following relation:

$$V_{2max}(k_{opt}) = \sqrt{\frac{R_2}{R_1}} \frac{V_g}{2}.$$

- 15 More generally, the relation linking voltage V_2 to coupling coefficient k can be written as:

$$V_2(k) = \frac{k R_2 V_g \sqrt{\frac{L_1}{L_2}}}{R_1 + k^2 \frac{L_1}{L_2} R_2}.$$

After determining the voltage V_2 to be obtained across capacitor C_2 , inductance L_2 is sized to the smallest possible value.

- 20 Then, capacitance C_2 of the oscillating circuit is determined according to the desired resonance frequency, based on relation:

$$C_2 = \frac{1}{L_2 \omega^2}.$$

The values may be adapted to maintain the integration of capacitor C_2 .

- 25 Knowing inductance L_2 , the value to be given to the inductance of antenna L_1 of the terminal to optimize the system can be determined. The relation linking these two values for the curve of Fig. 2 to be respected is, at the tuning, that is, for a sizing setting the resonance frequency to the frequency of the remote supply carrier:

$$L1 = \frac{R1L2}{R2k^2}.$$

Preferably, the value of inductance L1 is chosen to be as high as possible, that is, by maximizing its number of turns. Thus, according to the present invention, the number of turns of the terminal is relatively high, preferably between 3 and 15, and the number of turns of the transponder is relatively small, preferably smaller than 3. This choice is motivated by the fact that, to maximize resistance R2, the series parasitic resistance of inductance L2 must be as small as possible, and a small number of turns with conductors of relatively wide section is thus preferred. This choice must be compatible with the integration of capacitor C2. It should be noted that, on the terminal side, the number of turns of the terminal must remain compatible with a value of capacitance C1 that is sufficient to be realizable.

Preferably, the terminal will be provided with as small a resistance R1 as possible to obtain an optimal coupling at the greatest possible distance.

As a specific example of embodiment, for a 13.56-MHz carrier frequency and for a value of 370 nanohenrys for inductance L2, a capacitor C2 having a capacitance of 372 picofarads will be used. If the transponder's microprocessor requires a minimum voltage on the order of 4 volts to operate, a voltage V2 of approximately 5 volts will be chosen for a median distance position of the operating range. The preferred ranges of values are, for example, an inductance L2 of given value included between 0.1 and 10 μ H and capacitance C2 of given value included between 20 and 500 pf.

In an application to a low-consumption transponder of tag type, the number of turns is, preferably, equal to 1. In an application to a transponder of chip card type (equipped with a microcontroller) of greater consumption, the number of turns is preferably equal to 2.

It should be noted that the fact of structurally determining the respective values of the components of the oscillating circuits of the terminal and the transponder is not disturbing. Indeed, in most applications, a given transponder type is dedicated to a terminal. In particular, the operating characteristics of electromagnetic transponder systems are generally submitted to standards. Accordingly, it is not disturbing to definitively determine the relations between the oscillating circuits of a terminal and of a

transponder. Conversely, this is an advantage of the present invention since risks of unauthorized intervention on the transponder for piracy are thus avoided.

Preferably, the back modulation by the transponder will be capacitively performed, that is, by means of an electronic switch modifying the capacitance of the
5 oscillating circuit rather than the resistance. An advantage then is that the remote supply is less attenuated.

An advantage of the present invention is that it enables forming transponders and systems dedicated to an operation in distant range.

Another advantage of the present invention is that it fulfils the strictest
10 requirements to avoid piracy of a transponder.

Of course, the present invention is likely to have various alterations, modifications, and improvements which will readily occur to those skilled in the art. In particular, the choice of the values of the components of the oscillating circuits is within the abilities of those skilled in the art based on the function indications and on the
15 relations given hereabove, according to the application and, in particular, to the frequency of the carrier on which these oscillating circuits are to be tuned. Further, it should be noted that the present invention does not alter the respective operations of the transponder and of the terminal as concerns the digital processing circuits.

Among the applications of the present invention are readers (for example, access
20 control terminals or porticoes, automatic dispensers, computer terminals, telephone terminals, televisions or satellite decoders, etc.) of contactless chip cards (for example, identification cards for access control, electronic purse cards, cards for storing information about the card holder, consumer fidelity cards, toll television cards, etc.), as well as such chip cards.

Such alterations, modifications, and improvements are intended to be part of this
25 disclosure, and are intended to be within the spirit and the scope of the present invention. Accordingly, the foregoing description is by way of example only and is not intended to be limiting. The present invention is limited only as defined in the following claims and the equivalents thereto.

30 What is claimed is:

CLAIMS

1. An electromagnetic transponder of the type including a parallel oscillating circuit adapted to being excited by a series oscillating circuit of a read/write terminal when the transponder enters the field of the terminal, wherein the components of the oscillating circuit of the transponder are sized so that the coupling coefficient between the respective oscillating circuits of the terminal and of the transponder rapidly decreases when the distance separating the transponder from the terminal becomes smaller than a predetermined value.
2. The electromagnetic transponder of claim 1, wherein said value is 5 cm.
3. The electromagnetic transponder of claim 1, wherein an inductance of the parallel oscillating circuit is minimized.
4. The electromagnetic transponder of claim 1, wherein an inductance of the parallel oscillating circuit is chosen in accordance with the following relation:

$$k_{opt} = \sqrt{\frac{R_1 L_2}{R_2 L_1}},$$
 where k_{opt} represents the coupling coefficient providing a maximum voltage across the parallel oscillating circuit, where R_1 represents the series resistance of the series oscillating circuit, where R_2 represents the equivalent resistance of the transponder brought in parallel on inductance L_2 , and where L_1 represents the inductance of the series oscillating circuit.
5. The electromagnetic transponder of claim 1, having an oscillating circuit wherein the components are sized based on an operating point at a median distance of a desired operating range, chosen to correspond to a coupling coefficient as close as possible to an optimal coupling coefficient in accordance with the following relation:

$$V_{2max}(k_{opt}) = \sqrt{\frac{R_2}{R_1}} \frac{V_g}{2},$$

where V_{2max} is the voltage across the parallel oscillating circuit for the optimal coupling between the oscillating circuits, R_1 is the series resistance of the series oscillating circuit, R_2 is the equivalent resistance of the transponder brought in parallel on its oscillating circuit, and V_g is the excitation voltage of the series oscillating circuit.

5

6. The electromagnetic transponder of claim 1, wherein the number of turns of the inductance of its oscillating circuit is smaller than 3.

7. The electromagnetic transponder of claim 1, wherein the respective values
10 of the capacitance and of the inductance of the parallel oscillating circuit range between 20 and 500 pF and between 0.1 and 10 μ H.

8. A terminal for generating an electromagnetic field adapted to cooperating with at least one transponder when said transponder enters this field, including a series
15 oscillating circuit for generating the electromagnetic field, this series oscillating circuit being sized so that the coupling coefficient between the respective oscillating circuits of the terminal and of the transponder strongly decreases when the distance separating the transponder from the terminal becomes smaller than a predetermined value.

20 9. The terminal of claim 8, wherein the components of its oscillating circuit are sized to fulfill the operating conditions of the transponder of claim 1.

10. The terminal of claim 9, wherein the inductance of its series oscillating circuit includes between 3 and 15 turns.

25

11. A system of contactless electromagnetic transmission between a terminal and a transponder, wherein the transponder is that of claim 1.

12. A system of contactless electromagnetic transmission between a terminal
30 and a transponder, wherein the terminal is that of claim 8.

ABSTRACT

A system of contactless electromagnetic transmission between a terminal including a series oscillating circuit for generating an electromagnetic field and a transponder including a parallel oscillating circuit, these oscillating circuits being sized so that the coupling coefficient between them rapidly decreases when the distance separating the transponder from the terminal becomes smaller than a predetermined value.

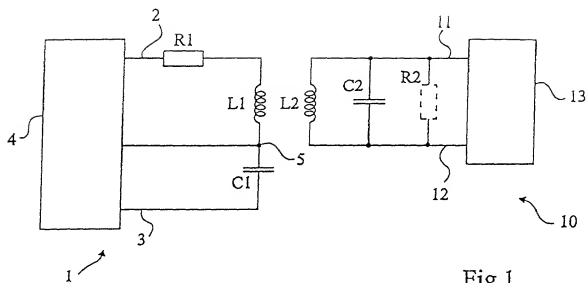


Fig 1

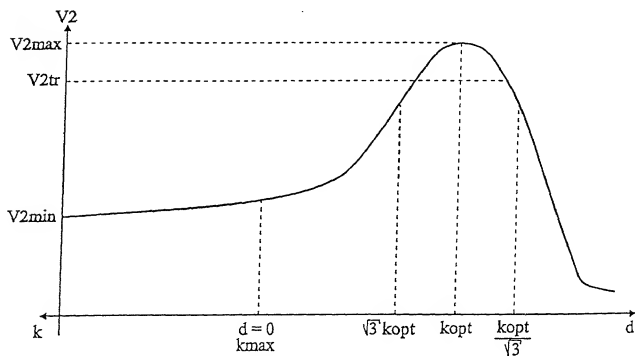


Fig 2

Declaration and Power of Attorney for Patent Application

Déclaration et Pouvoirs pour Demande de Brevet

French Language Declaration

En tant que l'inventeur nommé ci-après, je déclare par le présent acte que:

Mon domicile, mon adresse postale, et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.

Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée:

SIZING OF AN ELECTROMAGNETIC TRANSPONDER SYSTEM FOR A DEDICATED DISTANT COUPLING OPERATION

et dont la description est fournie ci-joint à moins que la case suivante n'ait été cochée:

☐ a été déposée le _____
sous le numéro de demande des États-Unis ou le
numéro de demande international PCT _____
et modifiée le _____
(le cas échéant).

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toute modification dont il aura été fait référence ci-dessus.

Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, §1.56 du Code fédéral des réglementations.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____
as United States Application Number or PCT
International Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, §119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35, § 365(a) du même Code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

Prior foreign application(s)
Demande(s) de brevet antérieure(s)
99/09564

FRANCE

(Number)
(Numéro)

(Country)
(Pays)

(Number)
(Numéro)

(Country)
(Pays)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35 §119(e) du Code des Etats-Unis, de toute demande de brevet provisoire effectuée aux Etats-Unis et figurant ci-dessous.

(Application No.)
(N° de demande)

(Filing Date)
(Date de dépôt)

(Application No.)
(N° de demande)

(Filing Date)
(Date de dépôt)

Je revendique par le présent acte, le bénéfice, en vertu du Titre 35 § 120 du Code des Etats-Unis, de toute demande de brevet effectuée aux Etats-Unis, ou en vertu du Titre 35, § 365(c) du même Code, de toute demande internationale PCT désignant les Etats-Unis et figurant ci-dessous et, dans la mesure où l'objet de chacune des revendications de cette demande de brevet n'est pas divulgué dans la demande antérieure américaine ou internationale PCT, en vertu des dispositions du premier paragraphe du Titre 35, § 112 du Code des Etats-Unis, je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code Fédéral des réglementations, dont j'ai pu disposer entre la date de dépôt de la demande antérieure et la date de dépôt de la demande nationale ou internationale PCT de la présente demande:

(Application No.)
(N° de Demande)

(Filing Date)
(Date de Dépôt)

(Application No.)
(N° de Demande)

(Filing Date)
(Date de Dépôt)

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la Section 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet délivré à partir de celle-ci.

I hereby claim foreign priority under Title 35, United States Code, §119(a)-(d) or § 365(b) of any foreign applications(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

20 JULY 1999

Priority not claimed
Droit de priorité non revendiqué

(Day/Month/Year Filed)

(Jour/Mois/Année de dépôt)

(Day/Month/Year Filed)

(Jour/Mois/Année de dépôt)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or § 365(c) of any PCT international application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Status)(Patented, pending abandoned)

(Statut)(breveté, en cours d'examen, abandonné)

(Status)(Patented, pending abandoned)

(Statut)(breveté, en cours d'examen, abandonné)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

French Language Declaration

POUVOIR: En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) et/ou agent(s) suivant(s) pour qu'(ils) poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marques: (mentionner le nom et le numéro d'enregistrement).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

David Wolf	17,528	Peter C. Lando	34,654	Paul D. Sorkin	40,212	Lisa E. Winsor	44,405
George L. Greenfield	17,756	Gary S. Engelson	35,128	John R. VanAmsterdam	33,228	Mark Steinberg	40,829
Stanley Sacks	19,900	Peter J. Gordon	35,164	Matthew B. Lowric	36,904	Stephen R. Finch	42,534
Edward F. Perlman	28,105	Randy J. Pritzker	35,986	Robert E. Rigby, Jr.	41,316	Joseph Teja, Jr.	45,157
Lawrence M. Green	29,384	Richard F. Giunta	36,149	Robert A. Skrivaneck, Jr.	40,886	Alan W. Steele	45,128
Steven J. Henry	27,900	Douglas R. Wolf	36,971	Robert M. Abrahamson	37,482	Daniel P. McLoughlin	P-46,066
Edward R. Gales	31,616	Elizabeth R. Plumer	36,637	Ivan D. Zikovsky	43,299	Robert H. Walat	P-46,324
Theresa A. Hendricks	30,389	Timothy J. Oyer	36,628	Alan B. Sherr	42,147	Thomas G. Field	P-45,596
William R. McClellan	29,409	John N. Anastasi	37,765	Edward J. Russavage	43,069	Michael J. Pomjanek	P-46,190
Ronald J. Krandsdorf	20,004	Helen C. Lockhart	39,248	John C. Gorecki	38,471	Theodore E. Galanthy	24,122
M. Lawrence Oliverio	30,915	James M. Hanftin, Jr.	37,929	William G. Gosz	27,787	Lisa K. Jorgenson	34,845
Jason M. Honeyman	31,624	Christopher S. Schultz	39,039	Neil P. Ferraro	39,188	Robert D. McCutcheon	38,717
James H. Morris	34,681					Jeff Moy	39,307

Adresser toute correspondance à:

Send correspondence to:

James H. Morris
Wolf, Greenfield & Sacks, P.C.
Federal Reserve Plaza
600 Atlantic Avenue, Boston, MA 02210-2211(USA)

Adresser tout appel téléphonique à:

Direct Telephone Calls to: (name and telephone number)

(Nom et numéro de téléphone)

James H. Morris
(617) 720-3500

Nom complet de l'unique ou premier inventeur WUIDART Luc	Full name of sole or first inventor
Signature de l'inventeur WUIDART Luc Date June 25 th 2000	Investor's signature Date
Domicile 83910 POURRIERES, FRANCE	Residence
Nationalité Belgian	Citizenship
Adresse Postale 12, Lotissement Le Cade	Post Office Address
Nom complet du second co-inventeur, le cas échéant ENGUENT Jean-Pierre	Full name of second or joint inventor
Signature de l'inventeur ENGUENT JEAN PIERRE Date June 25 th 2000	Investor's signature Date
Domicile 13119 SAINT SAVOURNIN, FRANCE	Residence
Nationalité French	Citizenship
Adresse Postale 6, Place de la Libération, La Valentine	Post Office Address

(Fournir les mêmes renseignements et la signature de tout co-inventeur supplémentaire.)

(Supply similar information and signature for third and sub-sequent joint inventors.)